

DIGITAL WIRELESS THERMOSTAT R3RF **Logictherm**


- 2xAA battery backup
- Attractive modern styling
- Surface mounting.
- Non-programmable
- Easy operation
- Wireless 868Mhz
- CE, Rohs R&TTE approved
- Wireless visual open distance 100m



Technical Data

Power Supply	- 2*AAA battery	Backlight	- White
Receiver relay Contact	- 10A	Sensor	- NTC 10K, 3950ohms at 25
Set Point Range	- 5~30	Accuracy	- ± 0.5 (step control by +0.5)
Ambient	- 0~50	Protection Class	- IP30
Relative Humidity	- 85%	Housing	- ABS to UL94-5 fire retardant plastic

Button Function




- 1) Dial it to adjust the setting temp.
- 2) Turn on/off the thermostat
- 3) Code pairing button

Temperature Clibration

Turn off thermostat, hold the button for 3 sec. to calibrate Temp, change the value by dialing the button.

Range: -8 ~ +8

Code Pairing

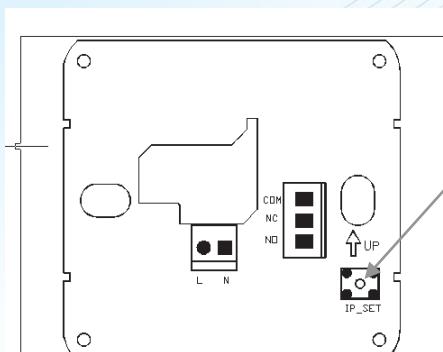

Pairing button

- 1st Press SETIP key on the transceiver, Green LED light blinking.
- 2nd Turn off the thermostat, press the button for 3 seconds, then press the button again until the code shows on the display, then dial the button clockwise, a BUZZ voice occurs , the green light stops blinking, the receiver and sender finish code pairing.

DIGITAL WIRELESS THERMOSTAT R3RF

Logictherm
ENERGY SAVING SOLUTIONS

Installation & Dimension

